
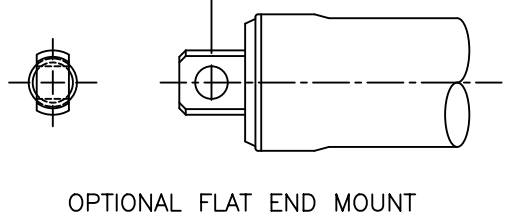


TYPICAL 18:1 GBX

LBS. LOAD	NOMINAL AMP DRAW	SPEED I.P.M.
0	5	66
250	9	64
500	11.5	60
750	15.5	55
1000	18.5	50
1250	22.5	45
1500	26	38

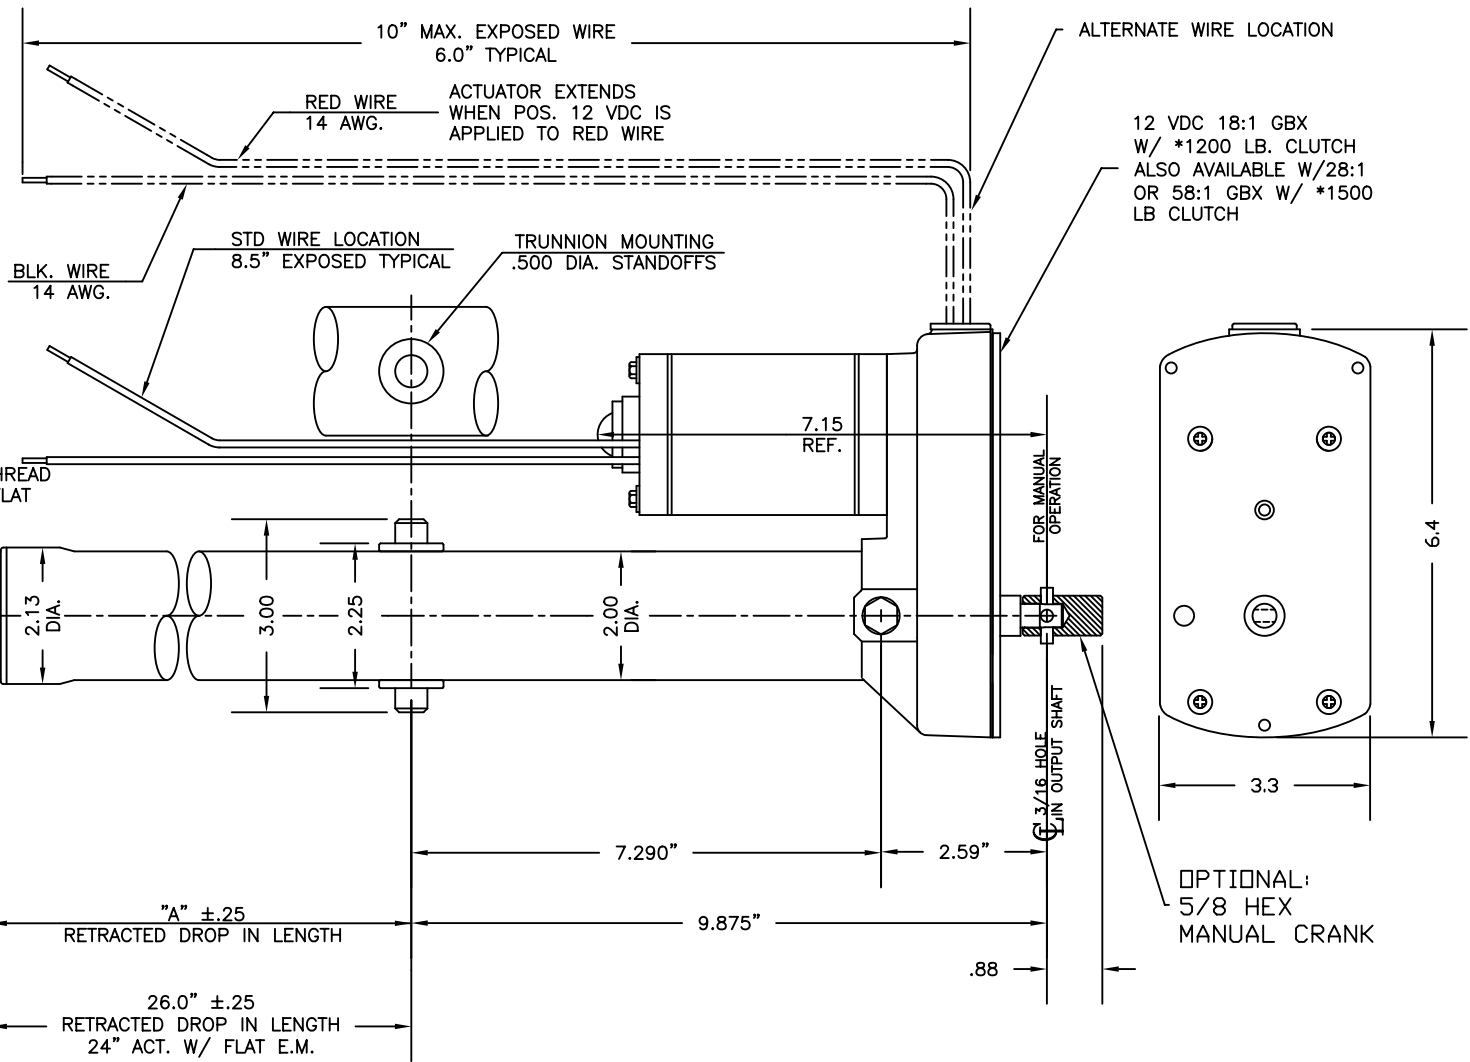

STROKE ±.25	"A" ±.25
24"	25.45"
32"	33.45"
36"	37.45"
40"	41.45"
43"	44.45"

MA-821B24L, MA-821B32L,
MA-821B36L, MA-821B40L
& MA-821B43L - STD 18:1
RV SLIDE OUT ACTUATORS
BASIC DIMENSIONS & SPECS



*NOTE: NOMINAL CLUTCH SETTING SET TO NOT BE LESS THAN RATED LOAD THRU LIFE OF ACTUATOR

JAN 2007

VENTURE MFG. CO.
 3636 DAYTON PARK DRIVE
 DAYTON OHIO 45414
 TEL: (937)233-6832
 FAX: (937)233-8485
 WEB PAGE: www.venturemfgco.com

TYPICAL HS 18:1 GBX

LBS. LOAD	NOMINAL AMP DRAW	SPEED I.P.M.
0	10	105
250	13	104
500	20	95
750	28	86
1000	39	73
1250	43	70

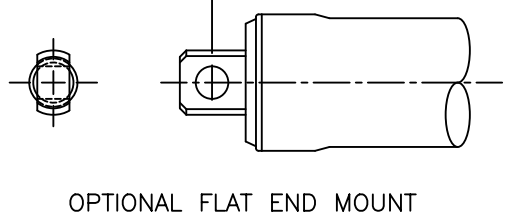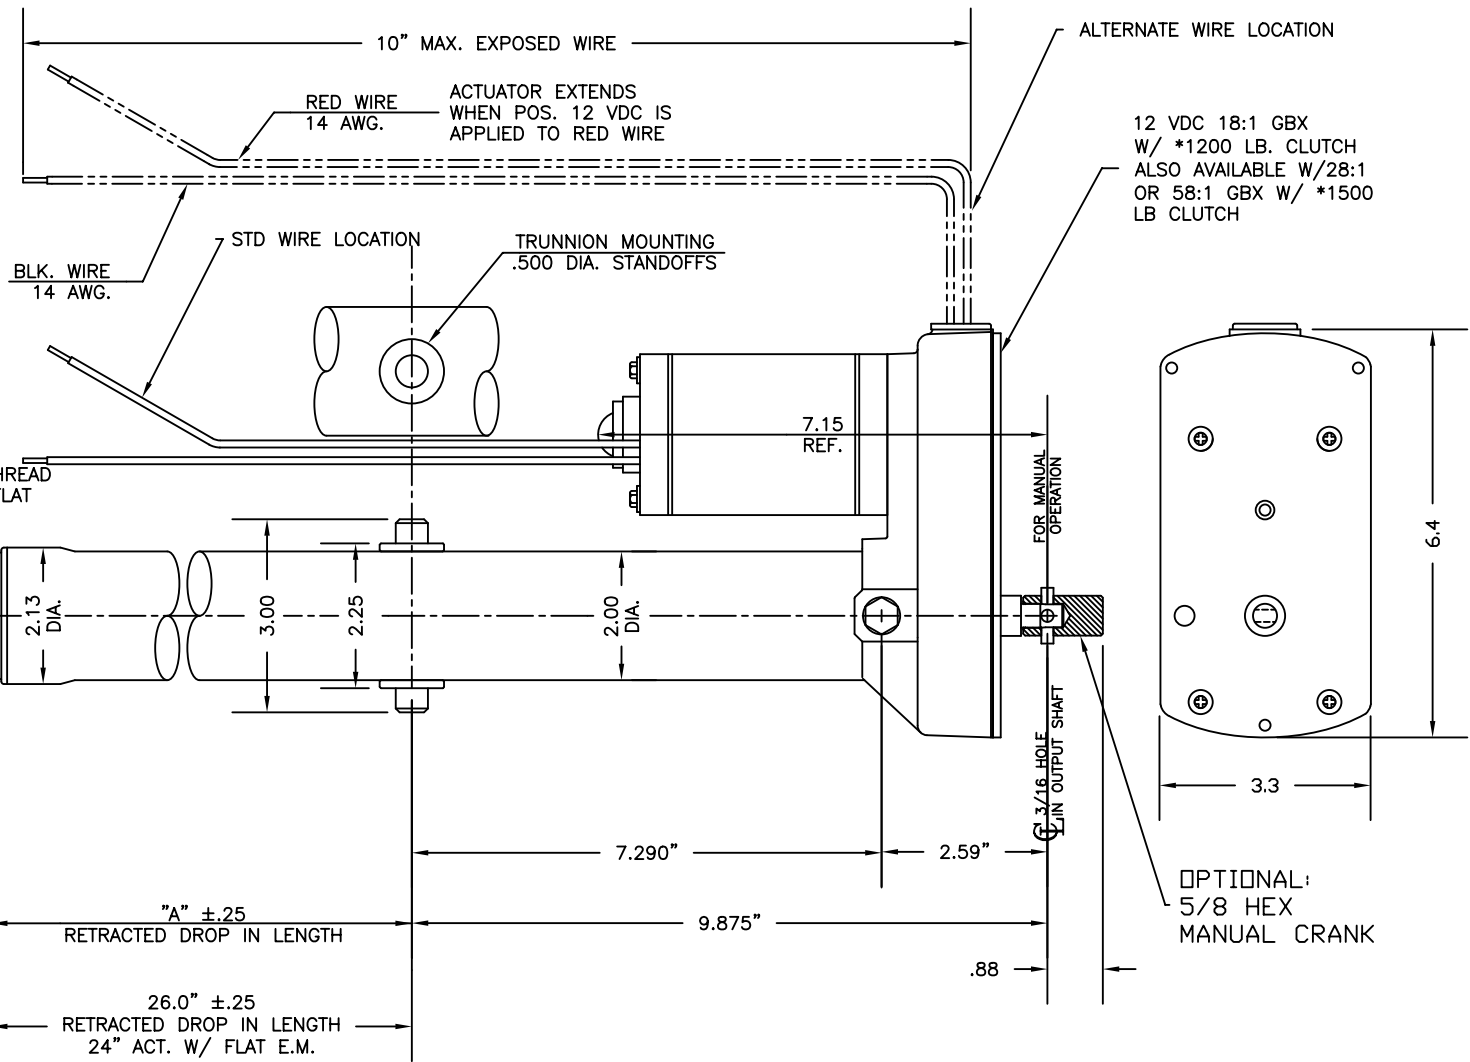

STROKE ±.25	"A" ±.25
24"	25.45"
32"	33.45"
36"	37.45"
40"	41.45"
43"	44.45"

MA-821B24LH, MA-821B32LH,
 MA-821B36LH, MA-821B40LH
 & MA-821B43LH - HS 18:1
 RV SLIDE OUT ACTUATORS
 BASIC DIMENSIONS & SPECS

*NOTE: NOMINAL CLUTCH SETTING SET TO NOT BE LESS THAN RATED LOAD THRU LIFE OF ACTUATOR

MAR 2007

VENTURE MFG. CO.
 3636 DAYTON PARK DRIVE
 DAYTON OHIO 45414
 TEL: (937)233-6832
 FAX: (937)233-8485
 WEB PAGE: www.venturemfgco.com